

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 July 2005 (14.07.2005)

PCT

(10) International Publication Number
WO 2005/063519 A1

(51) International Patent Classification⁷: **B60J 10/00**

(21) International Application Number:
PCT/IB2004/004222

(22) International Filing Date:
20 December 2004 (20.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0329888.2 23 December 2003 (23.12.2003) GB

(71) Applicant (for all designated States except US): **GDX NORTH AMERICA INC.** [US/US]; 615 South DuPont Highway, Dover, DE 19901 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DUMKE, Lothar** [DE/DE]; Elsterloh 17, 41069 Moenchengladbach (DE). **TODT, Bernd** [DE/DE]; Rahlstedter, Bahnhofstrasse 51, 22143 Hamburg (DE).

(74) Agent: **FOSTER, Mark, Charles**; Mathisen & Macara, The Coach House, 6-8 Swakeleys Road, Ickenham, Uxbridge UB10 8BZ (GB).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: SEALING, TRIMMING OR FINISHING STRIPS

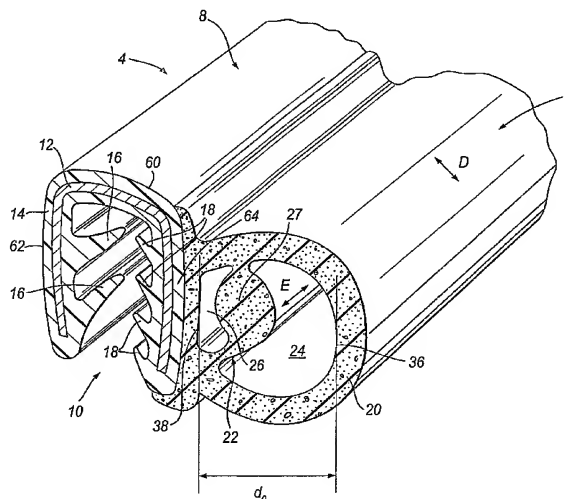

(57) Abstract: A sealing, trimming or finishing strip (4) comprises a longitudinally extending sealing part (6) defining a longitudinal hollow interior which becomes partially compressed in use, the hollow interior of the sealing part being provided with means (27) for controlling the compression of the sealing part (6). In an embodiment described, the compression controlling means (27) comprises an interior wall (22) spanning the hollow of the sealing part and thereby defining first and second longitudinally extending hollows (24, 26). The interior wall (22) includes a portion of relatively large cross-section, bulbous cross-section. The compression controlling means (27) may provide a "stop" which prevents or substantially reduces any further compression of the sealing part (6) beyond a desired amount.

WO 2005/063519 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.